

Fig.1

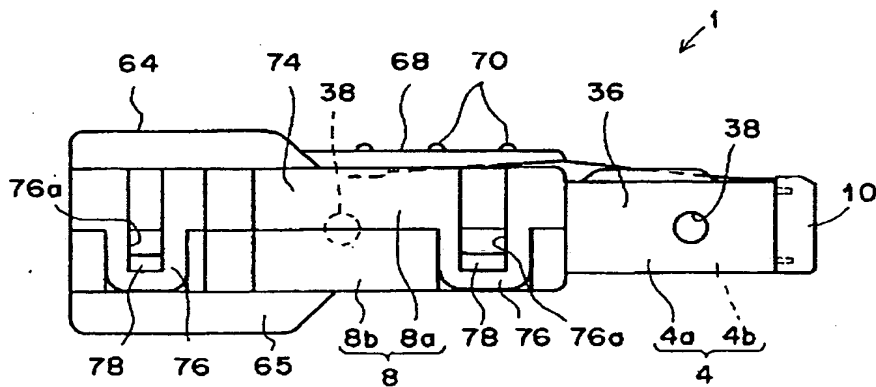


Fig.2

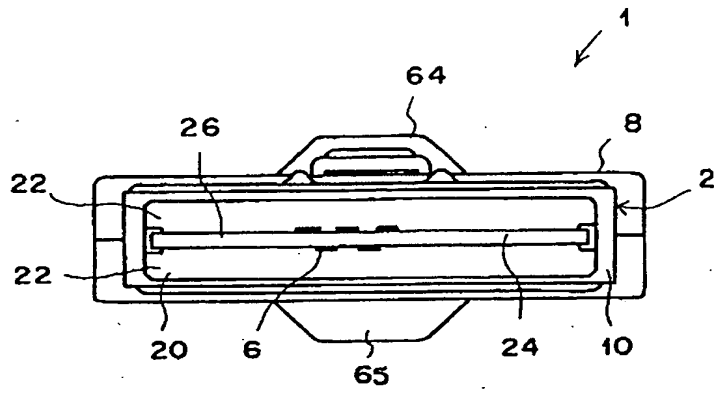


Fig.3

Fig. 3 is a cross-sectional view of the device of Fig. 1, taken along line III-III of Fig. 1, showing the inner component 6 and the outer housing 2. The inner component 6 has a central longitudinal slot 24. The outer housing 2 has a shoulder 26 on the left end and a shoulder 8 on the right end. A seal or gasket 10 is located between the inner component 6 and the housing 2 on the right side. A bracket 65 is shown at the bottom, indicating the inner component 6. A small feature 64 is located on top of the inner component 6. Two reference numerals 22 point to the inner walls of the housing 2.

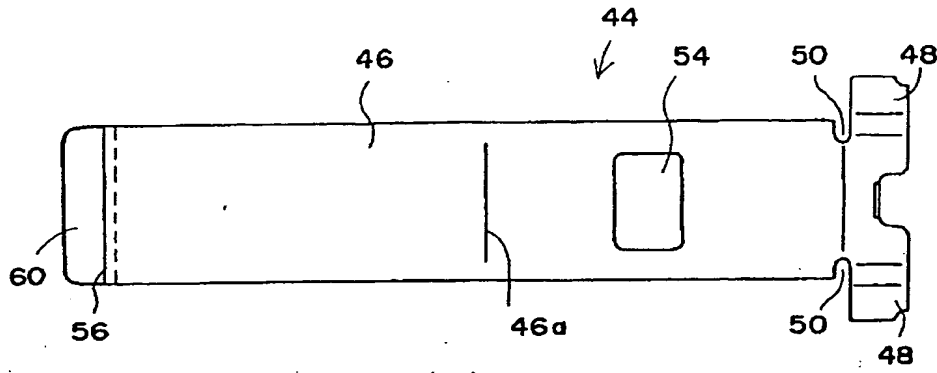


Fig. 4(A)

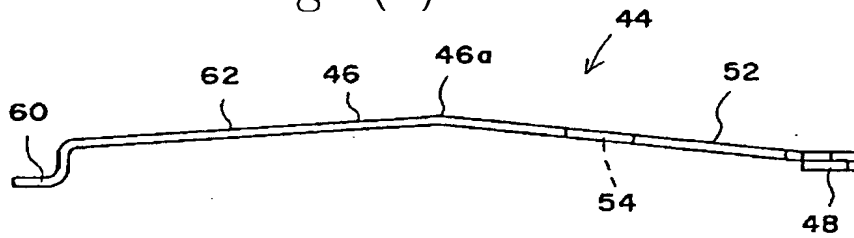


Fig. 4(B)






Fig. 4(C)



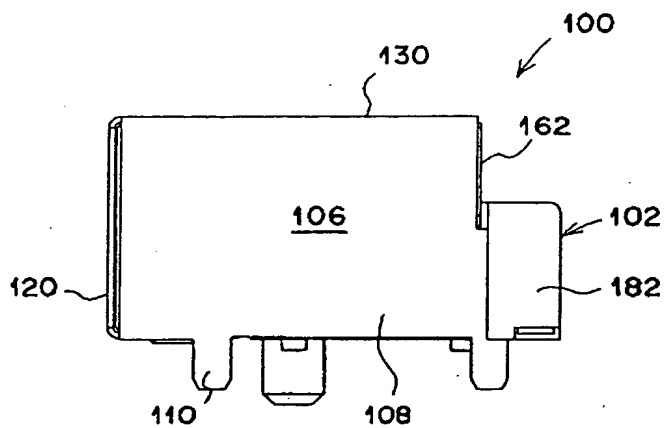


Fig. 7

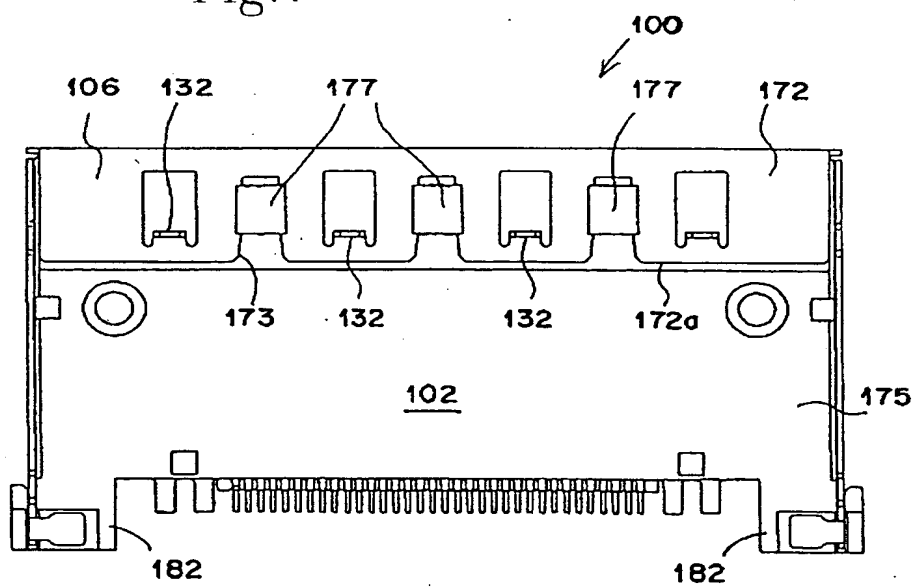


Fig. 8

